



Roof Windows

Product Specification



Futuretherm
Technology™

Window type



Centre Pivot

The most popular and versatile choice, suitable for most applications.




Fire Escape/Top Hung

Choose when a means of escape is required or when a 45° opening is preferred.



Integral Blind Roof Window


The attractive blind is permanently enclosed between the panes of glass and therefore is protected from moisture, dust and damage. Available as centre pivot & Fire Escape/Top Hung



Conservation Window

Ideal for use in a period style property, replicating the look of a traditional sky light. Available as centre pivot & Fire Escape/Top Hung

Finish



Natural Pine Finish



Natural White Finish

Options

Electrical Operation

Available in centre pivot only

Glazing

- ▶ Thermal Glazing
- ▶ Hi-therm Glazing
- ▶ Triple Glazing
- ▶ Thermal Frosted

Extended range


Vertical Bi-light

Maximise the light and ventilation in your room by combining both a pitched and vertical window.




Sun Lite™ Light Tube System

A Keylite Sun Lite™ transports natural daylight into areas where conventional pitched or flat roof windows cannot be used.




Ridge Windows

Windows installed at the highest point of a pitched ceiling create a striking feature.




Flat Roof Dome

Virtually unbreakable, with an impact strength 250 times greater than glass. Keylite Flat Roof Domes can be supplied with a clear or frosted finish.



Flat Roof System

Available in single or combi formats to enable the fitting of any Keylite Roof Window onto a flat roof.



Flat Roof Apex

These elegant overhead features provide natural daylight for spaces under flat roofs. Ideal for kitchens and living areas.



Keylite Roof Window Product Specifier

Choose an option from each column to build the code for your window.



Conservation (Optional)	Window Type	Size guide	Size (Colours denote window types available)	Glazing Spec	Electric Kit (Optional)																																										
CW Conservation Window. For conservation windows, "CW" must prefix all window codes	CP Centre Pivot, Pine Finish	●	<p>Width (mm)</p> <table border="1"> <tr> <td></td> <td>550</td> <td>660</td> <td>780</td> <td>940</td> <td>1140</td> <td>1340</td> </tr> <tr> <td>780</td> <td>01</td> <td>03A</td> <td>04A</td> <td>07A</td> <td>08A</td> <td>09A</td> </tr> <tr> <td>980</td> <td>02</td> <td>03B</td> <td>04</td> <td>07B</td> <td>08B</td> <td>09</td> </tr> <tr> <td>1180</td> <td>01C</td> <td>03</td> <td>05</td> <td>07C</td> <td>08</td> <td>09C</td> </tr> <tr> <td>1400</td> <td>01F</td> <td>03F</td> <td>06</td> <td>07F</td> <td>08F</td> <td>10</td> </tr> <tr> <td>1600</td> <td>01G</td> <td>03G</td> <td>04G</td> <td>07</td> <td>08G</td> <td>09G</td> </tr> </table> <p>● Non-Standard Size Roof Window range ■ Standard Size Roof Window range</p>		550	660	780	940	1140	1340	780	01	03A	04A	07A	08A	09A	980	02	03B	04	07B	08B	09	1180	01C	03	05	07C	08	09C	1400	01F	03F	06	07F	08F	10	1600	01G	03G	04G	07	08G	09G	T Thermal	SEK Standard Electric Window, wall mounted switch (Centre pivot only)
	550	660		780	940	1140	1340																																								
780	01	03A		04A	07A	08A	09A																																								
980	02	03B		04	07B	08B	09																																								
1180	01C	03		05	07C	08	09C																																								
1400	01F	03F		06	07F	08F	10																																								
1600	01G	03G		04G	07	08G	09G																																								
	WF-CP White Finish, Centre Pivot	●			HT Hi Therm, Self cleaning	PEK Premium Electric Window, Remote Control & Rain Sensor (Centre pivot only)																																									
	I-CP Integral Blind, Centre Pivot, Pine Finish	●			KTG Triple Glazed (Not available in sizes 08G or 09G)	SVK Smoke Ventilation System (Centre pivot only available in CP08 + CP10)																																									
	WF-I-CP White Finish, Integral Blind, Centre Pivot	●			TFR Thermal Frosted																																										
	EI-CP Electric Integral Blind, Centre Pivot, Pine Finish	●																																													
	WF-EI-CP White Finish, Electric Integral Blind, Centre Pivot	●																																													
	TH Top Hung, Pine Finish	●																																													
	WF-TH White Finish, Top Hung	●																																													
	I-TH Integral Blind, Top Hung, Pine Finish	size 02 only																																													
	WF-I-TH White Finish, Integral Blind, Top Hung	size 02 only																																													
	FE Fire Escape, Pine Finish	●																																													
	WF-FE White Finish, Fire Escape	●																																													
	I-FE Integral Blind, Fire Escape, Pine Finish	●																																													
	WF-I-FE White Finish, Integral Blind, Fire Escape	●																																													

Below are two example specifications

WF-FE-06-KTG CW-CP-08-T-SEK	WF-FE-06-KTG CW-CP-08-T-SEK	WF-FE-06-KTG CW-CP-08-T-SEK	WF-FE-06-KTG CW-CP-08-T-SEK	WF-FE-06-KTG CW-CP-08-T-SEK
--------------------------------	--------------------------------	--------------------------------	--------------------------------	--------------------------------

Window Configurations

The Keylite Technical Team will assist you to specify the optimum solution for your project and create an order schedule for combination windows and flashings.

Roof window layout options:



Single Window



Combi System



Bi-Lite System



Grid System



When specifying a combination of roof windows allowance must be made for the spacing between the windows and also for internal support trimmers.

Options for spacing between the windows.

- ▶ 100mm
- ▶ 50mm (on Combi System only)
- ▶ 18mm (on Combi System only)

Support Trimmer options

- ▶ White Internal Support Trimmer
- ▶ Pine Internal Support Trimmer


Combination flashing options to suit your roof finish.

- ▶ Tile Roof
- ▶ Slate Roof
- ▶ Plain Tile Roof - Combi System only

Flashings Range


Tile: TRF

- ▶ **Roof Pitch 20° – 90°**
- ▶ **Material Profile - Max 45 mm**
Flashing for single window installation into interlocking profiled tiles or interlocking plain tiles.

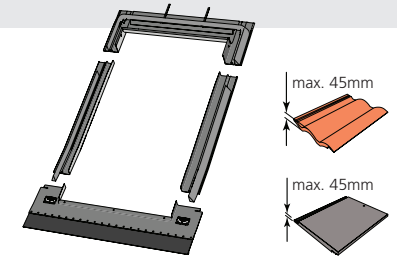


Deep Tile: DTRF

- ▶ **Roof Pitch 15° – 90°**
- ▶ **Material Profile – Max 90mm**
Flashing for single window installation into flat or profiled interlocking tiles. Also suitable for interlocking slate and profiled sheeting.

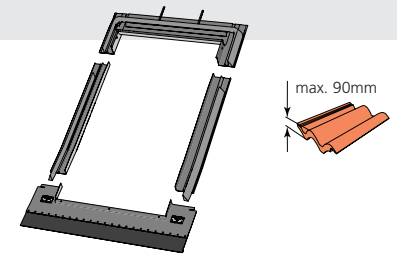

Slate: SRF

- ▶ **Roof Pitch 15° – 90°**
- ▶ **Material Profile – Max 10mm**
Flashing for single window installation into slate up to 10mm thick.
Not to be used with interlocking slate.

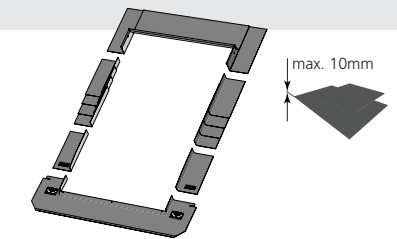

Plain Tile: PTRF

- ▶ **Roof Pitch 25° – 90°**
- ▶ **Material Profile – Max 15mm**
Flashing for single window installation into plain tiles.
Not to be used with interlocking plain tiles.

